

NUDURA STANDARD FORM UNIT AS SPECIFIED

BRICK VENEER WITH 50mm AIR SPACE AND BRICK TIES AS PER CODE

HORIZONTAL/VERTICAL REINFORCEMENT AS SPECIFIED BY LOCAL PRESCRIPTIVE OR ENGINEERING DESIGN

NUDURA WATERPROOF MEMBRANE LAPPED DOWN TO DPC/RADON BARRIER

WATERPROOF CONCRETE TO 152mm ABOVE GRADE OR LIQUID APPLIED OR MEMBRANE DPM OR WATERPROOF CONCRETE

PLASTER BOARD


FLOOR SCREED

NUDURA FLOOR TECHNOLOGY OR EQUIVALENT

CONCRETE FLOOR SLAB

SAND BLINDING

DAMP PROOF COURSE/RADON BARRIER

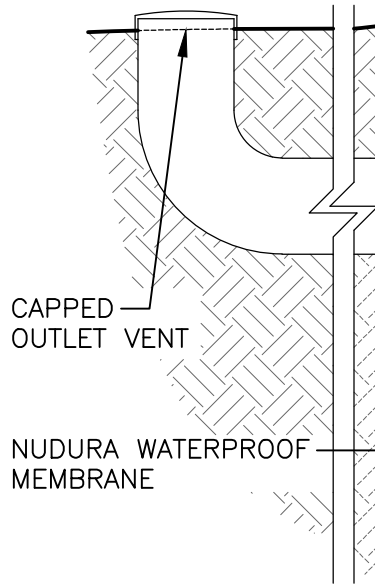

100mm RADON OUTLET PIPE AS SPECIFIED

CAPPED OUTLET VENT

NUDURA WATERPROOF MEMBRANE

COMPACTED GRANULAR FILL

TRENCH FILL FOUNDATION SIZED AS PER ENGINEERED DESIGN

DISCLAIMER NOTICE:
SPECIFIC INFORMATION
REQUIRED FOR COMPLIANCE
WITH LOCAL CODES IS THE
RESPONSIBILITY OF THE
DESIGNER



NUDURA

INTEGRATED BUILDING TECHNOLOGY

Building Value.

STANDARD 152mm FORM UNIT
STRIP FOOTING
FOUNDATION DETAILS
DAMP PROOF COURSING w/
RADON PROVISIONS, BRICK VENEER

REV. NO.
001 KS

DATE:
JULY 2019

DRAWN BY:
K. STILL

DWG NO.

EU-17B

SCALE:
1 : 8