

FIRE RATED CAULKING TO SECURE THE PLASTERBOARD TO THE SERVICE PIPE

FIRE RATED FOAM/ROCKWOOL INSULATION INSTALLED AROUND SERVICE PIPE AS SPECIFIED

NUDURA FORM UNIT

PLASTER BOARD


NUDURA EPS FOAM TO BE DISCONTINUOUS AROUND SERVICE PENETRATIONS (CLEARANCE TO BE DETERMINED BY ENGINEER OF RECORD OR LOCAL BUILDING CODE)

INTUMESCENT FIRESTOP SEALANT AS SPECIFIED

HORIZ/VERT REINFORCEMENT AS SPECIFIED BY LOCAL PRESCRIPTIVE OR ENGINEERING DESIGN

FIRESTOP COLLAR SECURED DIRECTLY TO CONCRETE

SERVICE PENETRATION PIPE AS SPECIFIED

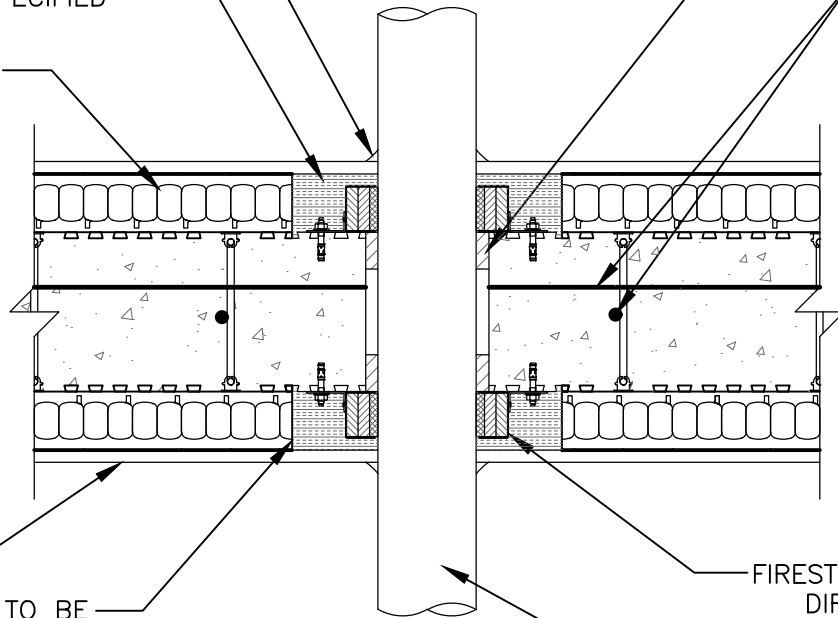

DISCLAIMER NOTICE:
SPECIFIC INFORMATION
REQUIRED FOR COMPLIANCE
WITH LOCAL CODES IS THE
RESPONSIBILITY OF THE
DESIGNER



NUDURA

INTEGRATED BUILDING TECHNOLOGY

Building Value.

NUDURA FORM UNIT
FIREWALL SERVICE PENETRATION

REV. NO.
001 KS

REV. DATE:
SEPT 2011

DRAWN BY:
K. STILL

DWG NO.

EU-40

SCALE:
1 : 8